

**ALPHA**

PRODUCT  
**CATALOGUE**

Shower Heater



TIMELESS  
ATTRACTION

# WEST<sup>®</sup>



## Premium Instant Shower Series

**BASIC**

**DIGITAL**

**NEON**

- Gold Cotton
- Blue Linen
- Black Canvas
- White Chiffon



### DIGITAL

- Inno TEST**  
24/7 Safety Protection
- SP 4.5 kW**  
Super-Fast Heating
- Silent DC Pump**
- 55% Energy Saving**  
Compared to AC Pump
- LED**  
Digital Screen
- Intelligent Temperature System™**
- Auto Pump Activator**
- E7!**  
Error Indicator
- Last Memory**

- Rain Shower Set**  
WES7/D-i RS - DC Pump
- Standard Shower Set**  
WES7/D-i STD - DC Pump



### NEON

- Inno TEST**  
24/7 Safety Protection
- SP 4.5 kW**  
Super-Fast Heating
- Silent DC Pump**
- 55% Energy Saving**  
Compared to AC Pump
- neon**  
Light Indicator
- Auto Pump Activator**

- Rain Shower Set**  
WES7/N-i RS - DC Pump
- Standard Shower Set**  
WES7/N-i STD - DC Pump



### BASIC

- SP 4.5 kW**  
Super-Fast Heating
- Silent DC Pump**
- 55% Energy Saving**  
Compared to AC Pump
- On/Off Pump Activator**

- Rain Shower Set**  
WES7/B-i RS - DC Pump
- Standard Shower Set**  
WES7/B-i STD - DC Pump

### WARRANTY

- 1 Year**  
Internal Parts
- 5 Years**  
DC Pump
- 7 Years**  
Heating Element
- 10 Years**  
Anti-Leak Tank
- 1 Year**  
On-Site Service

## 3-Spray Luxury Hand Shower

Massage

Comfort

Mix

# 13"

## Luxurious XL RAIN SHOWER

Easy-Switch Button →

## New 3-Way Diverter

Rain Shower

Hand Shower

Faucet

## INNOTEST™

Intelligent protection that runs safety inspections before every shower.

24/7 Protection

## 4.5kW Super Power

Fast heating and hotter water delivery.

25A heater connection is suggested.

## Canvas Shine Texture™

A tactile experience crafted from three layers of advanced etching technology.

## Auto Error Indicator

Error codes will digitally display and precisely identify fault types.

## Auto Pump Activator

Pumps and boosts water at flowrates as low as 1L/min.

## Intelligent Temperature System (ITS)™

Achieves your desired water temperature with perfect precision.

## Model Comparison

	DIGITAL	NEON	BASIC
4.5kW Heating Element	✓	✓	✓
InnoTest	✓	✓	N/A
Auto Pump Activator	✓	✓	N/A
Intelligent Temperature System (ITS)	✓	N/A	N/A
Control Type	Knob with Digital Screen	Display Knob with Neon Light	Knob
Error Code Display			N/A

# SMART REVO



## Features

- AutoTest Safety
- 4.2kW Fast Hot Water Delivery
- Low-Noise DC Pump
- Eco Mode
- TWIN-Jet Water Technology
- Line Fault Indicator
- Double Relay ELSD
- Nylon Fibre Tank
- Thermal Cut-Out 55°C & 85°C
- Splash-Proof Casing IP25 Standard
- Stepless Electronic Temperature Control
- Pump Activator
- Pump-Speed Control

## Pump Type

- REVO-i - DC Pump
- REVO-E - Non-Pump

- Mocha
  - Satin
  - Rose Gold
  - SK White
- \*SMART REVO i only*



# SMART 18i SP



**SPECIAL EDITION**

**ALL BLACK SHOWER ACCESSORIES**

**SP 4.5 kW**  
POWER RATING



- Matt Black

# SMART 18



- Matt Black
  - Metal Black
  - Ivory White
  - Misty Silver
- \*Only for SMART 18 E & 18i Standard*

## Features

- AutoTest Safety
- 4.5kW Power Rating (SP Model only)
- Low-Noise DC Pump
- Line Fault Indicator
- Double Relay ELSD
- Nylon Fibre Tank
- Thermal Cut-Out 55°C & 85°C
- Splash-Proof Casing IP25 Standard
- Stepless Electronic Temperature Control
- Pump Activator
- Pump-Speed Control

## Shower Type

- Rain Shower Set
- Standard Set

## Pump Type

- SMART 18-i SP - DC Pump
- SMART 18-i - DC Pump
- SMART 18-E - Non-Pump

## Shower Accessories

- All Black - SMART 18-i SP
- Chrome - SMART 18-i, SMART 18-E

# IM-9i SP



■ Matt Black

# IM-9



■ Matt Black ■ Metal Black ■ Misty Silver

## Features

- 4.5kW Power Rating (*SP Model only*)
- Low-Noise DC Pump
- Line Fault Indicator
- Double Relay ELSD
- Nylon Fibre Tank
- Thermal Cut-Out 55°C & 85°C
- Splash-Proof Casing IP25 Standard
- Stepless Electronic Temperature Control
- Pump Activator
- Pump-Speed Control

## Shower Type

- Rain Shower Set
- Standard Set

## Pump Type

- IM9-i SP - DC Pump
- IM9-i - DC Pump
- IM9-EP - AC Pump
- IM9-E - Non-Pump

## Shower Accessories

- All Black - IM9-i SP
- Chrome - IM9-i, IM9-EP, IM9-E

# EVO-i



■ Matt Black

# EVO



■ Matt Black □ White

## Features

- Low-Noise DC Pump
- Double Relay ELSD
- Nylon Fibre Tank
- Thermal Cut-Out 55°C & 85°C
- Splash-Proof Casing IP25 Standard
- Stepless Electronic Temperature Control
- Pump Activator
- Pump-Speed Control

## Shower Type

- Rain Shower Set
- Standard Set

## Pump Type

- EVO-i - DC Pump
- EVO-E - Non-Pump

## Shower Accessories

- All Black - EVO-i
- Chrome - EVO-i, EVO-E



■ Matt Black

■ Matt Black    □ White

- Features**
- Low-Noise DC Pump
  - Double Relay ELSD
  - Nylon Fibre Tank
  - Thermal Cut-Out 55°C & 85°C
  - Splash-Proof Casing IP25 Standard
  - Stepless Electronic Temperature Control
  - Pump Activator
  - Pump-Speed Control

- Shower Type**
- Rain Shower Set
  - Standard Set

- Pump Type**
- EZY-i - DC Pump
  - EZY-E - Non-Pump

- Shower Accessories**
- All Black - EZY-i
  - Chrome - EZY-i , EZY-E

- Features**
- Low-Noise DC Pump
  - Line Fault Indicator
  - Double Relay ELSD
  - Nylon Fibre Tank
  - Thermal Cut-Out 55°C & 85°C
  - Splash-Proof Casing IP25 Standard
  - Stepless Electronic Temperature Control
  - Pump Activator
  - Pump-Speed Control

- Shower Type**
- Rain Shower Set
  - Standard Set

- Pump Type**
- AS2-i - DC Pump
  - AS2-EP - AC Pump
  - AS-2E - Non-Pump

- Shower Accessories**
- Chrome - AS2-i , AS2-EP , AS2-E

AS-2



■ Matt Black    ■ Metal Black    ■ Misty Silver

**CX9**

■ DK Mocha

**S8**

■ DK Mocha

**F7**

■ DK Mocha

**V10**

■ Matt Black ■ Olive ■ Bianco

**Features**

- Low-Noise DC Pump
- Double Relay ELSD
- Nylon Fibre Tank
- Thermal Cut-Out 55°C & 85°C
- Splash-Proof Casing IP25 Standard
- Stepless Electronic Temperature Control
- Pump Activator
- Pump-Speed Control

**Shower Type**

- Rain Shower Set
- Standard Set

**Pump Type**

- CX9-i - DC Pump
- CX9-E - Non-Pump
- S8-i - DC Pump
- S8-E - Non-Pump
- F7-i - DC Pump
- F7-E - Non-Pump
- V10-i - DC Pump
- V10-E - Non-Pump

**Shower Accessories**

- Chrome - CX9-i , CX9-E
- Chrome - S8-i , S8-E
- Chrome - F7-i , F7-E
- Chrome - V10-i , V10-E

## LH 5000



Matt Black
  White

### Features

Double Relay ELSD

Nylon Fibre Tank

Thermal Cut-Out 55°C & 85°C

Splash-Proof Casing IP25 Standard

## VIZZ 98



Silver

### Shower Type

• Standard Set

### Pump Type

LH 5000-EP - AC Pump  
 VIZZ 98-EP - AC Pump

### Shower Accessories

Chrome - LH 5000-EP  
 - VIZZ 98-EP

## X5



White

### Features

Double Relay ELSD

Nylon Fibre Tank

Thermal Cut-Out 55°C & 85°C

Splash-Proof Casing IP25 Standard

## AE33



White

### Shower Type

• Standard Set

### Pump Type

X5-E - Non-Pump  
 AE-33E - Non-Pump

### Shower Accessories

Chrome - X5-E  
 - AE-33E

## RS



White

## RS (SHB)



White

## SK-17 (SHB)



### Features

Double Relay ELSD

Nylon Fibre Tank

Thermal Cut-Out 55°C & 85°C

Splash-Proof Casing IP25 Standard

### Shower Type

• Standard Set

### Pump Type

RS-E - Non-Pump  
 SK-17E - Non-Pump

### Shower Accessories

Chrome - RS-E  
 Chrome (Shower Bracket) - RS-E (SHB)  
 - SK-17E (SHB)

# SPECIFICATIONS

Model	Pump Rating	Noise Level	Heater Power Rating	Heater Dimension (mm)	Nett Weight
WES7/D-i	55W	<50dB	4.5kW 240V ~ 50 Hz	245 (W) x 326 (L) x 85 (H)	1.8 kg
WES7/N-i					1.8 kg
WES7/B-i					1.8 kg
REVO-i	80W	<40dB	4.2kW 240V ~ 50Hz	181 (W) x 1300 (L) x 505 (H)	6.6 kg
REVO-E	N/A	N/A			5.8 kg
SMART 18-i SP	55W	<40dB	4.5kW 240V ~ 50Hz	230 (W) x 414 (L) x 91 (H)	2.0 kg
SMART 18-i	55W	<40dB	3.8kW 240V ~ 50Hz		2.0 kg
SMART 18-E	N/A	N/A			1.4 kg
IM9-i SP	55W	<40dB	4.5kW 240V ~ 50Hz	213 (W) x 406 (L) x 86 (H)	2.5 kg
IM9-i	55W	<40dB	3.8kW 240V ~ 50Hz		2.5 kg
IM9-EP	120W	<70dB			3.0 kg
IM9-E	N/A	N/A			2.0 kg
EVO-i	55W	<40dB	3.8kW 240V ~ 50Hz	230 (W) x 360 (L) x 88 (H)	1.6 kg
EVO-E	N/A	N/A			1.2 kg
EZY-i	55W	<40dB	3.8kW 240V ~ 50Hz	210 (W) x 340 (L) x 94 (H)	1.8 kg
EZY-E	N/A	N/A			1.5 kg
AS2-i	55W	<40dB	3.8kW 240V ~ 50Hz	235 (W) x 404 (L) x 83 (H)	2.5 kg
AS2-EP	120W	<70dB			3.0 kg
AS2-E	N/A	N/A			2.0 kg
CX9-i	55W	<40dB	3.8kW 240V ~ 50Hz	220 (W) x 380 (L) x 94 (H)	2.0 kg
CX9-E	N/A	N/A			1.5 kg
S8-i	55W	<40dB	3.8kW 240V ~ 50Hz	220 (W) x 380 (L) x 99 (H)	2.0 kg
S8-E	N/A	N/A			1.5 kg
F7-i	55W	<40dB	3.8kW 240V ~ 50Hz	220 (W) x 380 (L) x 99 (H)	2.0 kg
F7-E	N/A	N/A			1.5 kg
V10-i	55W	<40dB	3.8kW 240V ~ 50Hz	220 (W) x 380 (L) x 96 (H)	2.0 kg
V10-E	N/A	N/A			1.5 kg
LH 5000-EP	120W	<70dB	3.8kW 240V ~ 50Hz	250 (W) x 365 (L) x 112 (H)	3.5 kg
VIZZ 98-EP	120W	<70dB	3.8kW 240V ~ 50Hz	250 (W) x 365 (L) x 112 (H)	3.5 kg
X5-E	N/A	N/A	3.8kW 240V ~ 50Hz	190 (W) x 320 (L) x 84 (H)	1.4 kg
AE-33E	N/A	N/A	3.8kW 240V ~ 50Hz	190 (W) x 320 (L) x 93 (H)	1.3 kg
RS-E	N/A	N/A	3.8kW 240V ~ 50Hz	180 (W) x 320 (L) x 87 (H)	1.2 kg
RS-E (SHB)					1.2 kg
SK-17E (SHB)	N/A	N/A	3.8kW 240V ~ 50Hz	152 (W) x 272 (L) x 103 (H)	1.2 kg

## ALPHA WARRANTY

### Instant Shower Heater

Internal Parts	1 year
Heating Element	5 years 7 years (WES7 only)
DC Pump	5 years
Anti-Leak Tank	10 years

### Storage Water Heater

Internal Parts	1 year
Heating Element	2 years
Anti-Leak Tank	5 years
On-Site Service	1 year

Specifications & measurements shown are subject to 5% variation.

Specifications and products shown are correct at the time of printing and may be subject to changes without prior notice. This product catalogue is for use in Malaysia only.


# STORAGE WATER HEATER

AST - CENTRALISED MULTI-POINT SYSTEM



Pre-fitted  
Isolation Barrier &  
Pressure Relief Valve

**WATER  
MAINS**  
STORAGE HEATER

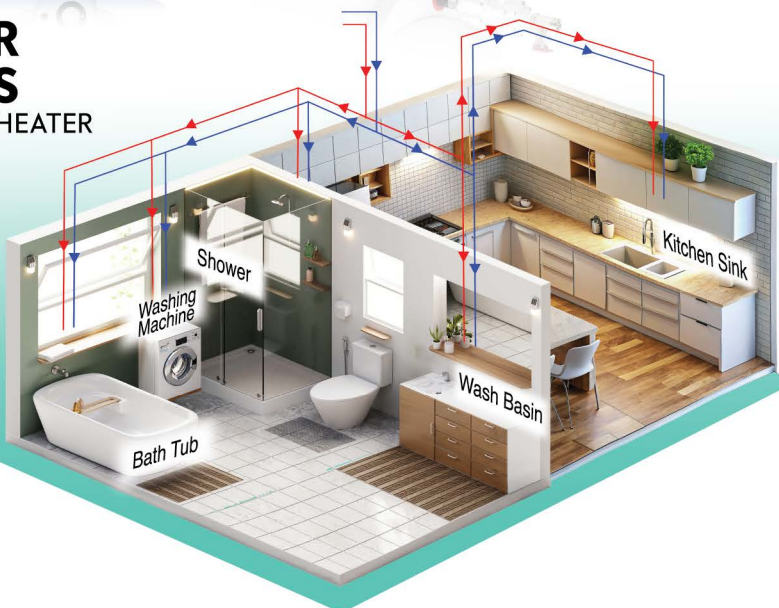

**FLEXIBLE &  
EASY  
INSTALLATION**



**SPACE-SAVING  
CONCEALED  
CEILING MOUNT**



**SAFE &  
DURABLE**




**IPX4  
Water-Proof  
Protection**



**Thermal Cut-Off  
Against  
Overheating > 93°C**



**Temperature  
Control  
25°C to 75°C**

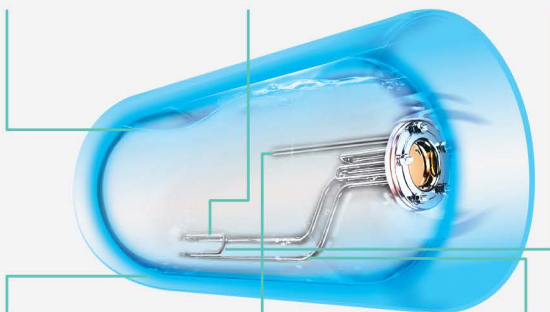

**Blue Diamond  
Enamel Coated**  
Corrosion resistance  
& anti-rust




**Magnesium  
Anode Rod**  
Protection against  
tank and heating  
element from scaling



**Incoloy 840  
Heating Element**  
Enhance lifespan  
against hard water

## DIMENSION

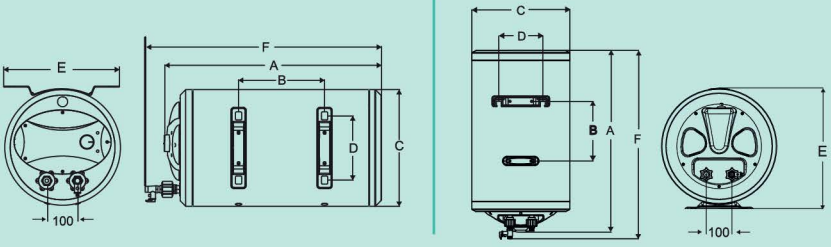

Horizontal Model	Capacity (Litre)	Dimension (mm)						Approx. Weight (kg)	
		A	B	C	D	E	F	Empty	Full
AST-30H	30	540	160	Φ 380	265	323	620	15.0	45.0
AST-40H	40	640	260	Φ 380	265	323	720	17.5	57.5
AST-50H	50	740	300	Φ 380	265	323	820	19.0	69.0
AST-70H	70	970	400	Φ 380	265	323	1050	23.5	93.5
AST-90H	90	1060	450	Φ 410	265	323	1140	27.0	117.0

Vertical Model	Capacity (Litre)	Dimension (mm)						Approx. Weight (kg)	
		A	B	C	D	E	F	Empty	Full
AST-30V	30	534	115	Φ 380	230	388	594	13.5	43.5
AST-50V	50	734	315	Φ 380	230	388	794	17.0	67.0

### 3 Mounting Styles - Floor / Hanging / Wall



**Floor**



**Hanging**



**Wall**

*\*Only for vertical model.*

### TECHNICAL SPECIFICATION

Power Rating	3.0 kW, 240V ~ 50/60Hz
Water Connection	ø 15.0 mm (1/2" BSP)
Working Pressure	0.02MPa (0.2 bar) - 0.80MPa (8.0 bar)
Pressure Relief Valve	0.80MPa (8.0 bar)

# ALPHA

**Alpha Home Appliances Sdn. Bhd.** 199601017907 (390258-H)

6, Jalan Sungai Kayu Ara 32/37, Berjaya Park,  
Section 32, 40460 Shah Alam, Selangor.

**Tel :** + 603 - 5740 6666  
+ 6012 - 379 5555 (WhatsApp/SMS Enquiries)

**Email :** [info@alphamalaysia.com](mailto:info@alphamalaysia.com)



[www.alphamalaysia.com](http://www.alphamalaysia.com)



Shower Heater Catalogue | 2026 1st Edition

- Specifications & measurements shown are subject to 5% variation.
- Specifications and products shown are correct at the time of printing and may be subject to changes without prior notice.
- The actual products and colours may vary slightly from the images shown due to printing considerations.
- This product catalogue is for use in Malaysia only.